

Archive Mail

Release Notes 2.7

Release Date : 30th April 2012

Setup document :

- Send E-mails to administrators if an error occurs.
- Database exclusion list.
- iNotes components automatic deployment on Mail server.

Profile document :

- %MAILFOLDER% keyword for Archive Databases path.
- Create Archive Database replica stub on cluster servers.
- Update view index after archiving.
- Define the Full Text index options :

Archive Databases Index	
Update View Index after process	<input type="checkbox"/> Yes
Create Full Text Index	<input type="checkbox"/> Yes (Required for Search module)
Attached Files	<input checked="" type="checkbox"/> Index Attached Files
Encrypted Fields	<input checked="" type="checkbox"/> Index Encrypted Fields
Sentence and Paragraph breaks	<input type="checkbox"/> Index sentence and paragraph breaks
Case Sensitive	<input type="checkbox"/> Enable case-sensitive searches

- Dedicated documents selection bloc for Extra Archive Databases.
- Mail Outline's Archive Folder Title can be defined.
- Mail Outline's Archive Database Entry Title can be defined.
- Mail Outline's Archive Entries may be sorted in Ascending or Descending order.
- Mail Outline's Notes native Archive entry may be hidden.
- iNotes parameters may be chosen based on Mail Template name.

Database document :


- Full Text status audited.
- Database Title audited.

Administration Request from any Mail Databases views :

- Add new Archive Database.
- Change Archive Server name.
- Export Archive Databases into HTML/XML when using NotesExtractor tool.

Agent :

- Mass-Change Option : Automatically populate Extra Archive Databases List from a .csv file.

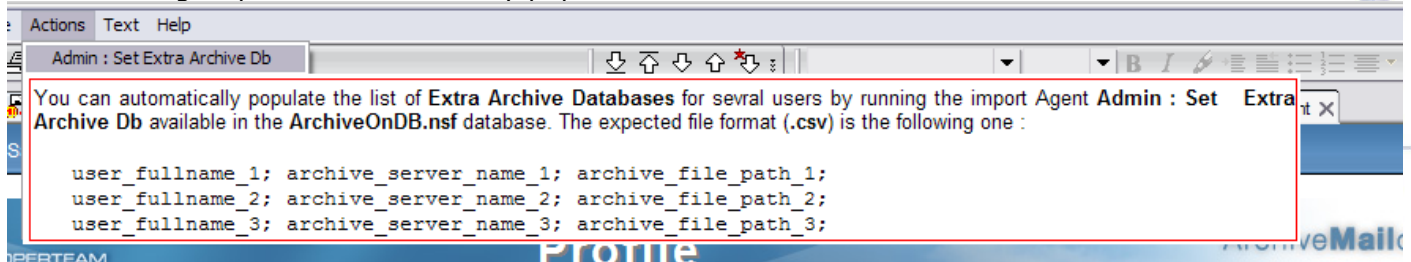

You can automatically populate the list of Extra Archive Databases for several users by running the import Agent Admin : Set Extra Archive Db available in the ArchiveOnDB.nsf database. The expected file format (.csv) is the following one :

```
user_fullname_1; archive_server_name_1; archive_file_path_1;
user_fullname_2; archive_server_name_2; archive_file_path_2;
user_fullname_3; archive_server_name_3; archive_file_path_3;
```

Multi-databases Search :

- The search library can be used locally on Notes client (then, search request is first done in local replicas).